





WASTE NOT – WANT NOT!
The SuperMax.

For economical, effective, efficient, ergonomic vacuum packaging: The WEBOMATIC® SuperMax.

Among the mobile single chamber machines the WEBOMATIC® SuperMax. takes over a special position. The smart and innovative ideas which facilitate your working day, a privilege of all WEBOMATIC® Vacuum Packaging Machines, are the most significant features of the WEBOMATIC® SuperMax.

In cooperation with the manufacturer a vacuum pump was produced which was especially adapted to the chamber size and the strong requirements of a hard working day in the production. We do not use only materials like stainless steel and acrylic glass, but exclusively the best materials for the construction as well as materials which are recyclable.

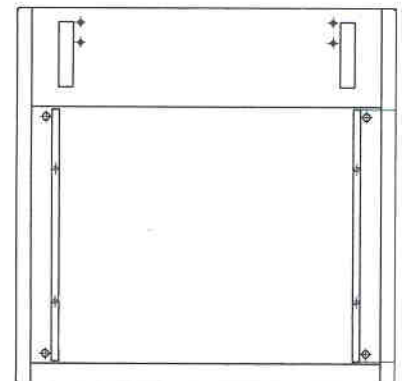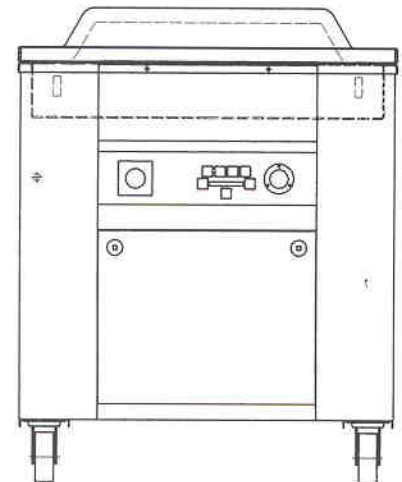

An equipment we are proud of: stainless steel chamber, laser polished acrylic glass lid, 2 sealing bars, which can easily be removed, vacuum-stop-function, safe sealing by means of using sealing cylinders even for gas flushing, service-friendly because of service-doors, plastic rolls with stainless steel hub and locking device

Technical data of the SuperMax.

Internal chamber dimensions (mm)	720 x 520 x 190	(W x D x H)
External dimensions (mm)	780 x 760 x 962	(W x D x H)
Sealing bar (mm)	2 x 510	
Weight net/gross	approx. 180/208 kg	
Connections:		
Electric:	400 V, 50 Hz, 3 Ph., PE	
Power:	1.5 kW 3.6 A	
Vacuum:		
High capacity pump:	50/55 m ³ /h	

Cycle capacity:

2–3 cycles/min., depending on the size of the product and the desired vacuum

Additional Equipment:

gas flushing

soft-air electrical
different voltages and frequencies
slanted insert
green-vac connection

Technical modifications reserved.
All WEBOMATIC®-machines comply to the CE-regulations valid in Europe.

Gherri Meat Technology srl
Via Prampolini, 44 - 43044 LEMIGNANO (PR)
Tel. 0521304085 - Fax 0521334197
Cod. Fisc. e Part. IVA IT 02056450345

WEBOMATIC®
Maschinenfabrik GmbH
Hansastraße 119
D-44866 Bochum
Telefon + 49-(0) 23 27 - 1 00 81
Telefax + 49-(0) 23 27 - 1 71 61
Internet: www.webomatic.de
E-mail: info@webomatic.de

WEBOMATIC®
Vacuum Packaging Systems